



SPOT LIGHT DOWNLIGHT HOTEL LIGHTING PANEL LIGHT

INTERIOR LIGHTING
EXTERIOR LIGHTING

RESIDENTIAL LIGHTING

PENDANT LIGHT
TRACKING LIGHT

BACKLIT PANEL

ACCENT LIGHTING

OFFICE LIGHTING

SOFT LIGHTS
ANTI-GLARE LIGHTS

COMMERCIAL LIGHTING

CEILING RECESSED & SURFACE LIGHT

STRIP LIGHT

TASK LIGHT SUPERMARKET LIGHTING

SHOPPING MALL LIGHTING


HOSPITALITY LIGHTING HYPERMARKET LIGHTING

SHelf LIGHT

RETAIL LIGHTING TRACK LIGHT

A modern interior space featuring a ceiling with track lighting and pendant lights. The room has a wooden floor, a blue beanbag chair, and a white table with chairs. Large windows on the right side offer a view of the outdoors. The ceiling is white with recessed lighting tracks and several green pendant lights hanging from it. The overall atmosphere is bright and contemporary.

CEILING SURFACE TRACK & PENDANT

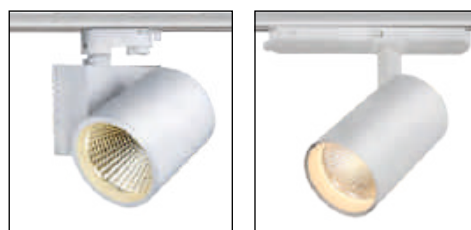

Housing

Exclusive and minimalistic cylindrical shape design 3 circuit track light contains powerful led and integrated driver which allows individual light scenes even without glare.

Luminaire body made of die cast aluminum high pure powder coated paint and reflector in specular silver anodized aluminum that can be easily and manually be replaced without using any tool.

Optic

Anti-glare designed luminaire
Narrow, medium and wide beam angles

Finish



White



Black

Available other finishes on request as per the availability.

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Accessories


No accessories






Functions

Supplied with Non-dimmable remote driver
Dimmable option: 0-10V, Triac, Dali
Available other options upon request.

CLARNIA

Clarnia Series
 Ø60/ Ø70/ Ø85/ Ø100

Tiltable Luminaire- Track 

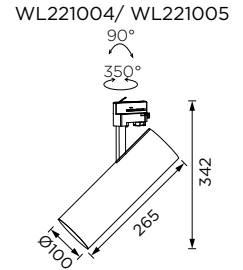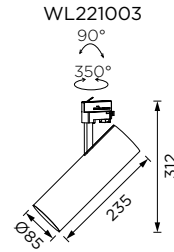

Technical Details


Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	90°/355°

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT


Tiltable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø60 - 10W	○ WL221000	Citizen	100-240VAC	90lm	WH (02)	12° (12)	2700K (27)	On/ Off
Ø70 - 15W	WL221001				BK (04)	24° (24)	3000K (30)	0-10V
- 20W	WL221002				GR (06)	36° (36)	4000K (40)	Triac
Ø85 - 28W	WL221003					45° (45)	5000K (50)	Dali
Ø100 - 42W	WL221004					60° (60)		
- 50W	WL221005							

WL221000-900lm/ WL221001-1350lm
 WL221002-1800lm/ WL221003-2520lm
 WL221004-3780lm/ WL221005-4500lm

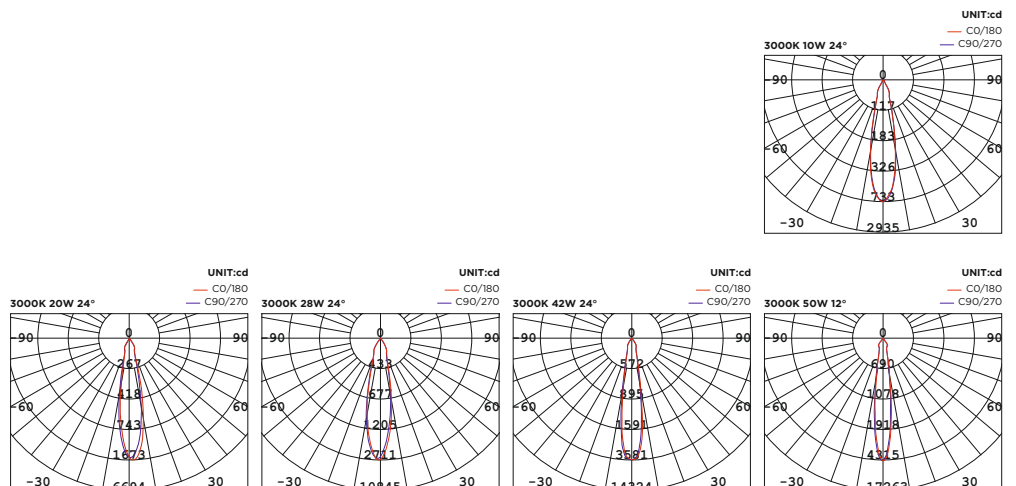


CLARNIA

Clarnia Series
 Ø83/ Ø93/ Ø106


Tilttable Luminaire- Track 




WL221006/ WL221007



WL221008



WL221009




Technical Details


Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	90°/355°

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø83 - 15W	 WL221006	Citizen	100-240VAC	86-90lm	WH (02)	15° (15)	2700K (27)	On/ Off
- 20W	WL221007				BK (04)	24° (24)	3000K (30)	0-10V
Ø93 - 28W	WL221008				GR (06)	30° (30)	4000K (40)	Triac
Ø106 - 38W	WL221009					45° (45)	5000K (50)	Dali
						60° (60)		

WL221006-1350lm/ WL221007-1800lm
 WL221008-2500lm/ WL221009-3300lm

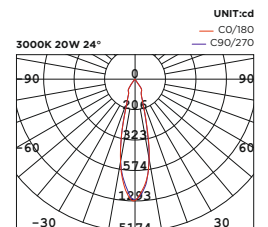


CLARNIA



Clarnia Series
 Ø80/ Ø96/ Ø108

Tilttable Luminaire- Track ○

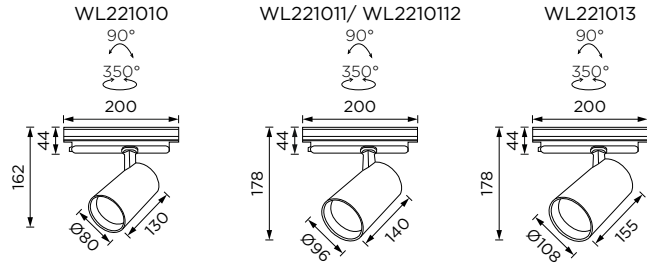

Technical Details


Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	90°/355°

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø80 - 20W	○ WL221010	Citizen	100-240VAC	86-90lm	WH (02)	15° (15)	2700K (27)	On/ Off
Ø96 - 28W	WL221011				BK (04)	20° (20)	3000K (30)	0-10V
- 35W	WL221012				GR (06)	30° (30)	4000K (40)	Triac
Ø108 - 42W	WL221013					55° (55)	5000K (50)	Dali

WL221010-1350lm/ WL221011-1800lm
 WL221012-2500lm/ WL221013-3300lm

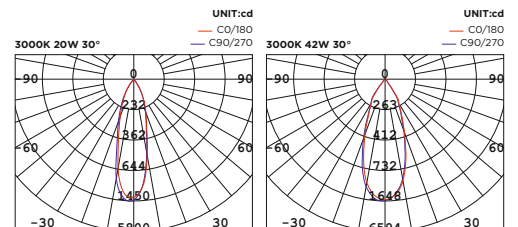

SERIES GRAIND



Housing

Slim and elegant designed 3 circuit track light made of extruded aluminum with highly pure powder coating paint. The fixture has a low glare and it is useful for many tasks.

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Optic

Anti glare designed luminaire
Narrow and medium beam angles

Accessories

No accessories

Finish



Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver
Dimmable option: 0-10V, Triac, Dali
Available other options upon request.

GRAIND


Graind Series

Ø100

Tilttable Luminaire- Track ○



WL221019/ WL221020



Technical Details


Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	90°/355°

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø100 - 20W - 28W	○ WL221019 WL221020	Cree	220-240VAC	90lm	WH (02)	15° (15)	2700K (27)	On/ Off
					BK (04)	24° (24)	3000K (30)	0-10V
					GR (06)	36° (36)	4000K (40)	Triac
							5000K (50)	Dali

WL221019-1800lm/ WL221020-2520lm

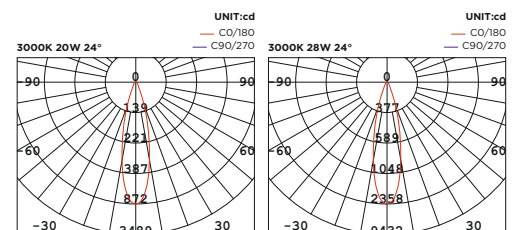



SPOT LIGHT DOWN LIGHT HOTEL LIGHTING PANELED LIGHT
 INTERIOR LIGHTING RESIDENTIAL LIGHTING PENDANT LIGHT
 HANGING LIGHT
 AMBIENT LIGHTING OFFICE LIGHTING SOFT LIGHTS
 ACCENT LIGHTING ANTI-GLARE LIGHTS
 COMMERCIAL LIGHTING CEILING RECESSED & SURFACE LIGHT STRIP LIGHT
 TASK LIGHT SUPERMARKET LIGHTING SHOPPING MALL LIGHTING
 HOSPITALITY LIGHTING HYPERMARKET LIGHTING SHELF LIGHT
 RETAIL LIGHTING TRACK LIGHT





Housing

Crescent series surface mounted ceiling light adopts high lumen SMD LED, fire-rated PC diffuser with even light output. IP54 waterproof structural design, it is an ideal replacement for damp locations.

Emergency function With Smart IC control which switches automatically once the power is switched off.

Optic

PC Diffuser

LED Source

Adopts high quality SMD LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Accessories

No accessories

Finish



White



Black

Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali.


Emergency 0-3hrs, Built in sensors.

Available other options on request


CRESCENT



Crescent Series
 Ø250/ Ø300/ Ø350/ Ø400
 Fixed Luminaire- Surface ○



Crescent Series
 250x250/ 300x300/ 350x350/ 400x400
 Fixed Luminaire- Surface □

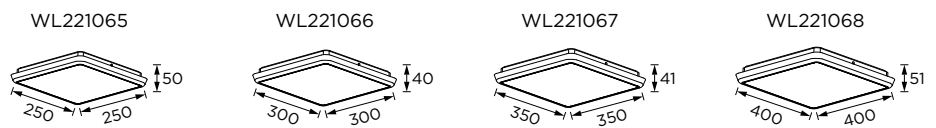



Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP54
IK Protection	IK05
Tilt/Rotate	NA

Order Code Example: **WL221000.02.10.30**
Product Code.Color Finish.Beam Angle.CCT


Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø250 - 12W	○ WL221061	SMD LED	220-240VAC	103-106lm	WH (02)	120° (120)	2700K (27)	On/ Off
Ø300 - 18W	WL221062				BK (04)		3000K (30)	0-10V
Ø350 - 25W	WL221063						4000K (40)	Triac
Ø400 - 30W	WL221064						5000K (50)	Dali Emergency

250x250 - 12W	□ WL221065
300x300 - 18W	WL221066
350x350 - 25W	WL221067
400x400 - 30W	WL221068

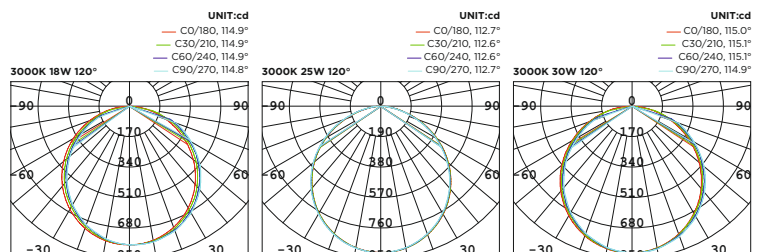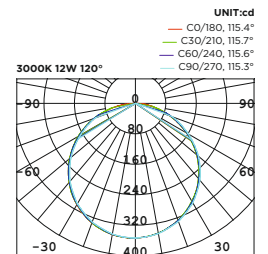

WL221061, WL221065-1260lm/ WL221062, WL221066-1910lm
 WL221063, WL221067-2575lm/ WL221064, WL221068-3090lm

SERIES ELLIE

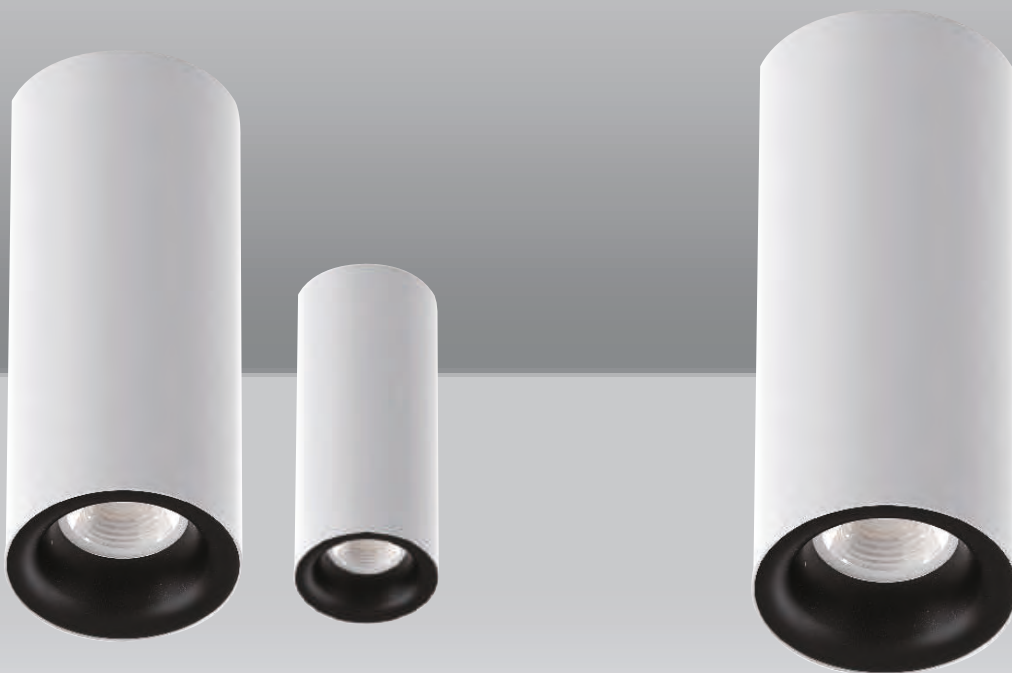

Housing

Versatile design cylinder surface mount design gives small aperture conveys a distinctive architectural or high-tech appearance.

Luminaire made of die cast aluminum body in closed chamber for dust free.

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Optic

High intensive tempered glass narrow, medium and wide beam angle available.

Accessories

No accessories

Finish



White



Black

Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali

Available other options upon request.

ELLIE



Ellie Series

Ø42.5/ Ø52.5/ Ø77.5


Fixed Luminaire- Surface




WL221016



WL221017



WL221018




Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø42.5 - 4.5W	WL221016	Cree	220-240VAC	77-99lm	WH (02)	22° (22)	2700K (27)	On/ Off
Ø52.5 - 8.5W	WL221017				BK (04)	40° (40)	3000K (30)	0-10V
Ø77.5 - 12.5W	WL221018				GR (06)		4000K (40)	Triac
							5000K (50)	Dali

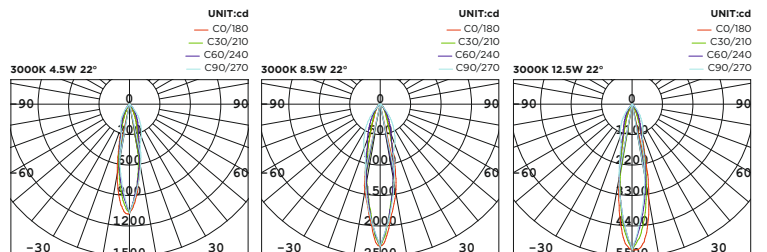

WL221016-349lm/ WL221017-754lm/ WL221018-1243lm

SERIES GRACE



Housing

Simple and elegant design ceiling mounted and pendant light adopt deep anti-glare multi finish reflector using for multi applications.

Body made of extruded aluminum with high purity powder coated paint which gives long life

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Optic

Multi reflector with wide beam angle

Accessories



Faceted Reflector



Specula Reflector

Finish



White



Black

Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali


Available other options upon request.

GRACE



Grace Series
 Ø143/ Ø170/ Ø213

Fixed Luminaire- Surface ○

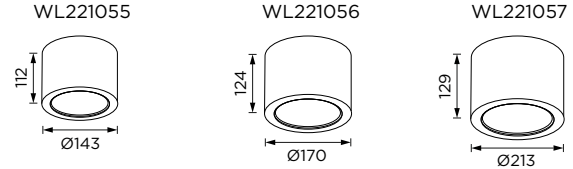


Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP54
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø143 - 13W	○ WL221055	COB LED	220-240VAC	105-117lm	WH (02)	60° (60)	2700K (27)	On/ Off
Ø170 - 18W	WL221056				BK (04)	90° (90)	3000K (30)	0-10V
Ø213 - 25W	WL221057						4000K (40)	Triac
							5000K (50)	Dali

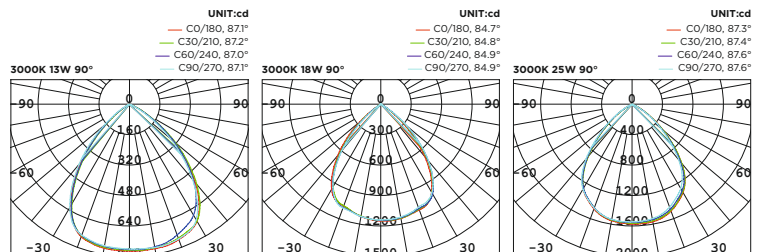

WL221055-1460lm/ WL221056-1890lm/ WL221057-2930lm




GRACE



Grace Series

Ø143/ Ø170/ Ø213

Fixed Luminaire- Pendant ○

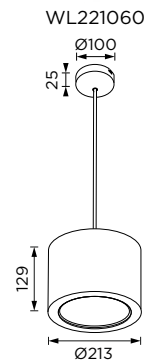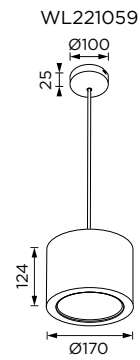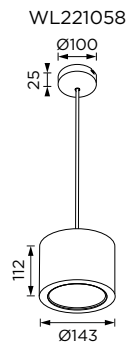


Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP54
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø143 - 13W	○ WL221058	COB LED	220-240VAC	105-117lm	WH (02)	60° (60)	2700K (27)	On/ Off
Ø170 - 18W	WL221059				BK (04)	90° (90)	3000K (30)	0-10V
Ø213 - 25W	WL221060						4000K (40)	Triac
							5000K (50)	Dali

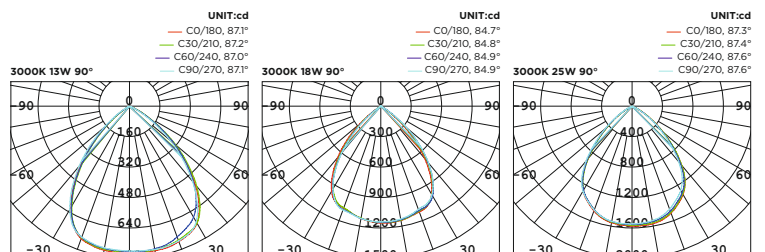

WL221058-1460lm/ WL221059-1890lm/ WL221060-2930lm



SPOT LIGHT DOWN LIGHT HOTEL LIGHTING PANEL LIGHT
INTERIOR LIGHTING RESIDENTIAL LIGHTING PENDANT LIGHT HANGING LIGHT
EXTERIOR LIGHTING BACKLIT PANEL LIGHT ACCENT LIGHTING OFFICE LIGHTING SOFT LIGHTS ANTI-GLARE LIGHTS
COMMERCIAL LIGHTING CEILING RECESSED & SURFACE LIGHT STRIP LIGHT
TASK LIGHT SUPERMARKET LIGHTING SHOPPING MALL LIGHTING
HOSPITALITY LIGHTING HYPERMARKET LIGHTING SHELF LIGHT
RETAIL LIGHTING TRACK LIGHT

SERIES MONTUR



Housing

Simple and elegant modern design round and square surface mounted light adopt high brightness led and it can be adjustable as per the light requirements.

Body made of die cast aluminum and mounted with aluminum bracket on the ceiling.

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Optic

Narrow, medium and wide beam angle available.

Accessories

No accessories

Finish



White



Black

Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali

Available other options upon request.

MONTUR




Montur Series
90x90/ 115x115


Tilttable Luminaire- SURface



WL221025/ WL221026



WL221027




Montur Series
Ø90/ Ø115


Tilttable Luminaire- Surface



WL221028/ WL221029



WL221030



Technical Details


Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	25°/ 350°

Order Code Example: **WL111000.02.10.30**

Product Code.Color.Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
90x90 - 6W	<input type="checkbox"/> WL221025	Citizen	100-240VAC	103-117lm	WH (02)	24° (24)	2700K (27)	On/ Off
- 10W	WL221026				BK (04)	36° (36)	3000K (30)	0-10V
115x115 - 20W	WL221027					60° (60)	4000K (40)	Triac
							5000K (50)	Dali

Ø90 - 6W	<input type="radio"/> WL221028
- 10W	WL221029
Ø115 - 20W	WL221030

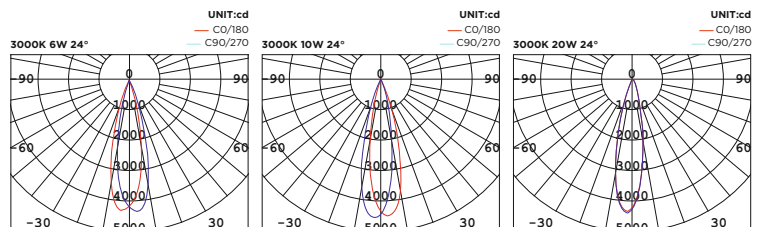

WL221025, WL221028-630lm
WL221026, WL221029-1030lm
WL221027, WL221030-2350lm



Housing

Simple cylinder anti-glare design luminaire available in 3 different application like ceiling surface, with or without adjustable and pendant contain high lumen LED and multiple beam angle PMMA lens offer uniform lighting output.

Body and heat sink made of aluminum which provides excellent heat dissipation with integrated driver.

Optic

High intensive tempered glass narrow, medium and wide beam angle available.

Finish



White



Black

Available other finishes on request as per the availability.

170 Indoor Catalogue - Ceiling Surface, Track & Pendant

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Accessories

No accessories

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali

Available other options upon request.

OLEVE




Oleve Series
 Ø65/ Ø85/ Ø100


Fixed Luminaire- Surface




WL221037/ WL221038



WL221039/ WL221040



WL221041/ WL221042








Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø65 - 10W	WL221037	COB LED	220-240VAC	86-112lm	WH (02)	24° (24)	2700K (27)	On/ Off
	BK (04)				30° (30)	3000K (30)	0-10V	
Ø85 - 20W	WL221039					36° (36)	4000K (40)	Triac
	WL221040					45° (45)	5000K (50)	Dali
Ø100 - 30W	WL221041					60° (60)		
	WL221042							

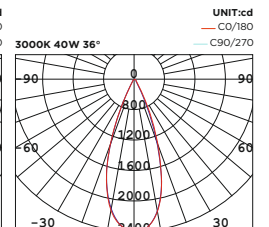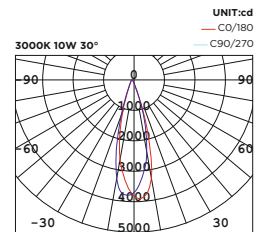


WL221037-1100lm/ WL221038-1300lm
 WL221039-2250lm/ WL221040-2700lm
 WL221041-3050lm/ WL221042-4200lm

OLEVE

Oleve Series
 Ø65/ Ø85/ Ø100

Fixed Luminaire- Pendant ○

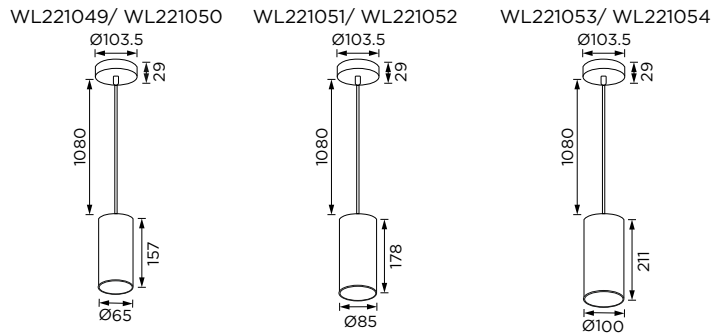






Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø65 - 10W	○ WL221049	COB LED	220-240VAC	86-112lm	WH (02)	24° (24)	2700K (27)	On/ Off
	BK (04)				30° (30)	3000K (30)	0-10V	
Ø85 - 20W	WL221051					36° (36)	4000K (40)	Triac
	WL221052					45° (45)	5000K (50)	Dali
Ø100 - 30W	WL221053					60° (60)		
	WL221054							

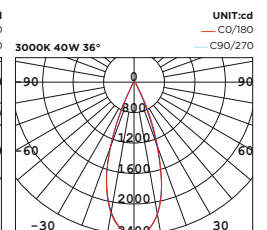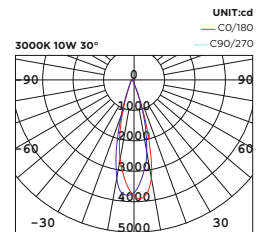

WL221049-1100lm/ WL221050-1300lm
 WL221051-2250lm/ WL221052-2700lm
 WL221053-3050lm/ WL221054-4200lm

OLEVE




Oleve Series
 Ø65/ Ø85/ Ø100


Tilttable Luminaire- Surface ○




WL221043/ WL221044



WL221045/ WL221046



WL221047/ WL221048








Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP20
IK Protection	NA
Tilt/Rotate	90°/350°

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Tilttable Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø65 - 10W	○ WL221043	COB LED	220-240VAC	86-112lm	WH (02)	24° (24)	2700K (27)	On/ Off
	- 15W					WL221044	BK (04)	30° (30)
Ø85 - 20W	WL221045	COB LED	220-240VAC	86-112lm	WH (02)	36° (36)	4000K (40)	Triac
	- 25W					WL221046	45° (45)	5000K (50)
Ø100 - 30W	WL221047	COB LED	220-240VAC	86-112lm	WH (02)	60° (60)		
	- 40W					WL221048		

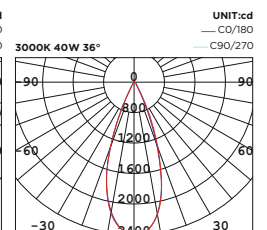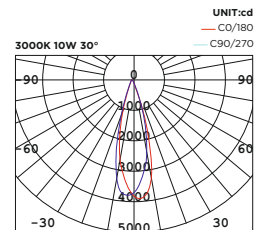

WL221043-1100lm/ WL221044-1300lm
 WL221045-2250lm/ WL221046-2700lm
 WL221047-3050lm/ WL221048-4200lm



SPOT LIGHT DOWN LIGHT HOTEL LIGHTING PANEL LIGHT
INTERIOR LIGHTING RESIDENTIAL LIGHTING PENDANT LIGHT
EXTERIOR LIGHTING AMBIENT LIGHTING OFFICE LIGHTING SOFT LIGHTS
BACKLIT PANEL ACCENT LIGHTING COMMERCIAL LIGHTING CEILING RECESSED & SURFACE LIGHT STRIP LIGHT
TASK LIGHT SUPERMARKET LIGHTING SHOPPING MALL LIGHTING
HOSPITALITY LIGHTING HYPERMARKET LIGHTING SHELF LIGHT
RETAIL LIGHTING TRACK LIGHT





Housing

Round and square ceiling mounted luminaire with light trim in die cast aluminum inclusive of PMMA diffuser with even light output.

Luminaire body made with IP54 waterproof structural design and idea replacement for damp location.

LED Source

Adopts high quality SMD LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Optic

PMMA diffuser with 100° wide beam angle

Accessories

No accessories

Finish



White



Black

Available other finishes on request as per the availability.

Functions

Supplied with Non-dimmable remote driver


Dimmable option: 0-10V, Triac, Dali

Available other options upon request.


OLIVER



Oliver Series
100x100/ 150x150/ 170x170
Fixed Luminaire- Surface

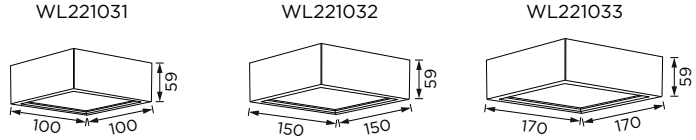

Oliver Series
Ø100/ Ø150/ Ø170
Fixed Luminaire- Surface

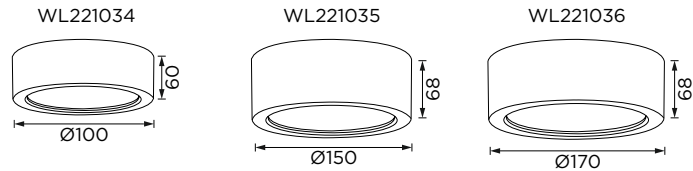

Technical Details


Operating Temp -20°C-+45°C
Life Time 50,000hrs
Power Factor >0.9
Power Cable 3x0.75mm²/ L=0.5m
IP Rate IP54
IK Protection NA
Tilt/Rotate NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy lm/W	Finish	Beam Angle	Color Temp	Driver Options
100x100 - 8W	<input type="checkbox"/> WL221031	SMD LED	220-240VAC	87-94lm	WH (02)	100° (100)	2700K (27)	On/ Off
150x150 - 15W	WL221032				BK (04)		3000K (30)	0-10V
170x170 - 18W	WL221033						4000K (40)	Triac
							5000K (50)	Dali

Ø100 - 8W WL221034
Ø150 - 15W WL221035
Ø170 - 18W WL221036

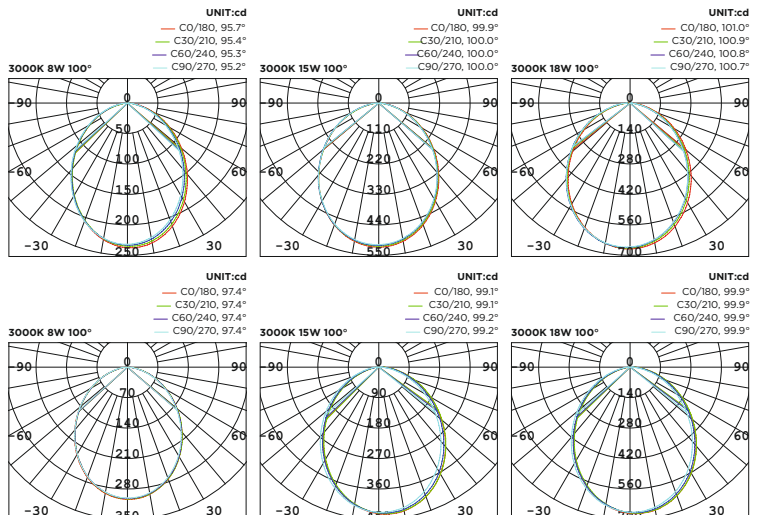

WL221031, WL221034-696lm
WL221032, WL221035-1365lm
WL221033, WL221036-1692lm



Housing

Adopts elegant and concave design, which makes the luminous surface compact and with magic 3D effects. Ip65 waterproof and Ik10 impact resistant luminaire is suitable for the wet areas.

Surface mounted and suspended installation are also optional equipped with rotating lamp fixture, makes the surface mounted installation much easier.

Optic

High intensive tempered glass narrow, medium and wide beam angle available.

Finish



White



Black

Available other finishes on request as per the availability.

178 Indoor Catalogue - Ceiling Surface, Track & Pendant

LED Source

Adopts high quality SMD LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Accessories

No accessories

Functions

Supplied with Non-dimmable remote driver

Dimmable option: 0-10V, Triac, Dali


Available other options upon request.

PUNTO



Punto Series
 Ø270/ Ø320/ Ø420/ Ø520

Fixed Luminaire- Surface

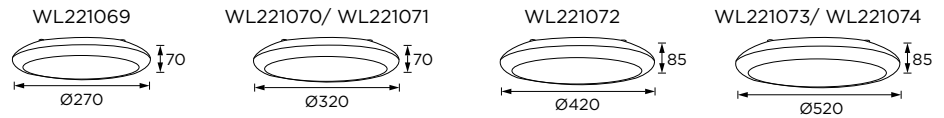


Technical Details

Operating Temp	-20°C-+50°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP65
IK Protection	IK10
Tilt/Rotate	NA

Order Code Example: **WL221000.02.10.30**
Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø270 - 12W	WL221069	SMD led	220-240VAC	102-107lm	WH (02)	120° (120)	2700K (27)	On/ Off
Ø320 - 18W	WL221070				BK (04)		3000K (30)	0-10V
- 25W	WL221071						4000K (40)	Triac
Ø420 - 30W	WL221072						5000K (50)	Dali
Ø520 - 35W	WL221073							Emergency
- 40W	WL221074							

WL221069-1280lm/ WL221070-1940lm
 WL221071-2560lm/ WL221072-3060lm
 WL221073-3670lm/ WL221074-4160lm

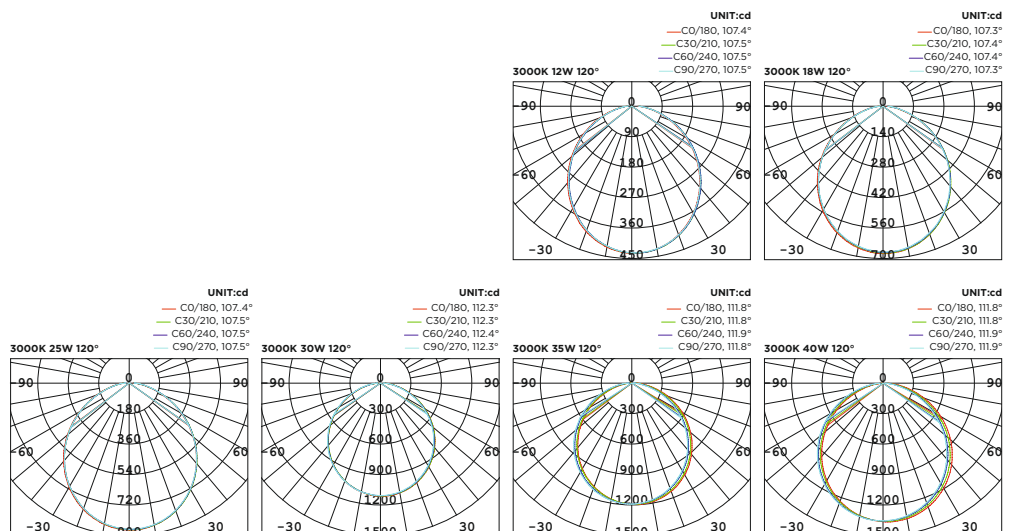

SERIES THAMES



Housing

Simple designed down light with traditional deep anti glare reflector that provides perfect combination of high lighting efficiency, comfortable lighting and humanization design without compromising on light performance

Luminaire made of extruded aluminum with oxidation treatment provides corrosion resistance and excellent heat dissipation performance.

Optic

Narrow, medium and wide beam angle available.

Finish



White



Black

Available other finishes on request as per the availability.

LED Source

Adopts high quality COB LED as a light source with CRI: 80+ and CCT: 2700K/3000K/4000K/5000K.

Other CRI and CCT available upon request as per the availability.

Accessories

No accessories

Functions


Supplied with Non-dimmable remote driver




Dimmable option: 0-10V, Triac, Dali

Available other options upon request.

THAMES

Thames Series
 Ø100/ Ø120/ Ø170

Fixed Luminaire- Surface 




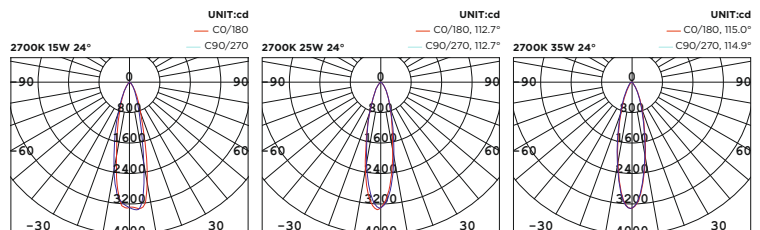
Technical Details

Operating Temp	-20°C-+45°C
Life Time	50,000hrs
Power Factor	>0.9
Power Cable	3x0.75mm ² / L=0.5m
IP Rate	IP54
IK Protection	NA
Tilt/Rotate	NA

Order Code Example: **WL111000.02.10.30**

Product Code.Color Finish.Beam Angle.CCT

Fixed Luminaire	Product Code	Light Source	Input	Efficacy Im/W	Finish	Beam Angle	Color Temp	Driver Options
Ø100 - 15W	 WL221022	COB LED	220-240VAC	111-116lm	WH (02)	24° (24)	2700K (27)	On/ Off
Ø120 - 25W	WL221023				BK (04)	36° (36)	3000K (30)	0-10V
Ø170 - 35W	WL221024					60° (60)	4000K (40) 5000K (50)	Triac Dali



WL221022-1750lm/ WL221023-2800lm/ WL221024-3900lm