


LUP290 FLOOR MARKER LUMINAIRE

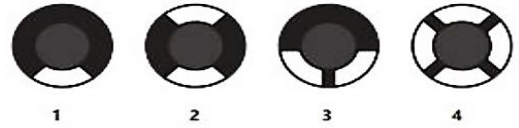

GENERAL & MECHANICAL FEATURES

Dimension:	Ø150 x H61mm
Housing:	Aluminum housing with powder coating
Finishes:	Powder coating black RAL9011
Installation:	with recessed box
Ingress Protection:	IP67
Impact Resistance:	IK10
Operating Temperature:	from -20 °C to +50°C

LIGHTING & ELECTRICAL FEATURES

Lamp source:	LED
Average LED Life:	50000 Hrs.
CCT:	3000K
Lumen Output:	450 Lm
Total Delivered Lumens:	230 Lm
Power:	5 W
Beam Angle	120° (Two windows)
Control Protocol:	On/off
Voltage:	AC 220V
Dimming:	No
Power Cables:	Includes 1.0m neoprene cable, H05RN-F, 3 *1.0mm2.

DESCRIPTION

Inground luminaire for illuminating the ground and horizontal surfaces with light distribution options from one, two or four sectors. Designed for use in shopping, pedestrian & park areas. Main characteristics are low glare. These products are suitable for general public areas that encounter high pressure loads from automobiles.

DIMENSION

